




PILOT BORE SPROCKETS - STAINLESS STEEL

SPROCKETS

Description

Stainless Steel pilot bore sprockets are manufactured to internationally recognised standards DIN8187-ISO/R 606 and are produced from 304L stainless steel.

Conveniently stocked with a minimum pilot bore (dimension 'D') they can be machined to suit any suitable mounting requirement. Available from stock to suit British standard roller chains from 06B (3/8" pitch) up to 16B (1" pitch) sizes in Simplex (single) row of teeth.

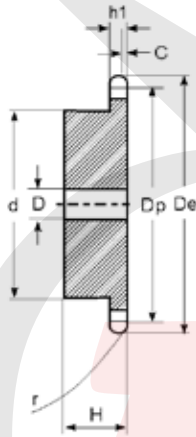

08B Chain 1/2" x 5/16"

Pitch: 12.7mm
Internal width: 7.75mm
Roller dia: 8.51mm

Sprocket

Tooth radius r: 13mm
Radius width C: 1.3mm
Tooth width h1: 7.2mm

08B-1 (4SR) SS

Teeth	De	Dp	Part No.	d	D	H
12	53.00	49.07	4SR12-SS	33	10	25
13	57.40	53.06	4SR13-SS	37	10	25
14	61.80	57.07	4SR14-SS	41	10	25
15	65.50	61.09	4SR15-SS	45	10	25
16	69.50	65.10	4SR16-SS	50	12	28
17	73.60	69.11	4SR17-SS	52	12	28
18	77.80	73.14	4SR18-SS	56	12	28
19	81.70	77.16	4SR19-SS	60	12	28
20	85.80	81.19	4SR20-SS	64	12	28
21	89.70	85.22	4SR21-SS	68	12	28
22	93.80	89.24	4SR22-SS	70	12	28
23	98.20	93.27	4SR23-SS	70	14	28
24	101.80	97.29	4SR24-SS	70	14	28
25	105.80	101.33	4SR25-SS	70	14	28
26	110.00	105.36	4SR26-SS	70	16	28
27	114.00	109.40	4SR27-SS	70	16	28
28	118.00	113.42	4SR28-SS	70	16	28
29	122.00	117.46	4SR29-SS	80	16	28
30	126.10	121.50	4SR30-SS	80	16	28