




Imperial Spur Gears in Steel 8DP, 20° P.A

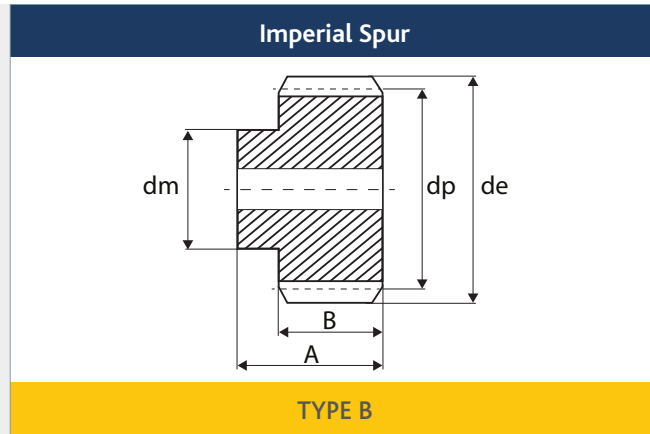

- Intermediate sizes and special gears to drawing up to 39" diameter
- Standard tolerances, unless otherwise stated ± 0.010 ins
- Standard: BS 436 Pt1, fig 1. Grade 8 / 9
- All dimensions in inches
- Steel EN8, (080M40/080M46) or equivalent

Code	No. teeth	Pitch \varnothing dp	Outside \varnothing de	Hub/Boss \varnothing dm	Bore \varnothing H8	O/A width A	Face width B
SSDP8/12B	12	1.5	1.75	1.13	0.75	2	1.25
SSDP8/14B	14	1.75	2	1.25	0.75	2	1.25
SSDP8/15B	15	1.875	2.125	1.38	0.875	2	1.25
SSDP8/16B	16	2	2.25	1.5	0.875	2	1.25
SSDP8/18B	18	2.25	2.5	1.75	0.875	2	1.25
SSDP8/20B	20	2.5	2.75	1.75	0.875	2	1.25
SSDP8/22B	22	2.75	3	1.75	0.875	2	1.25
SSDP8/24B	24	3	3.25	2	0.875	2.25	1.25
SSDP8/28B	28	3.5	3.75	2	0.875	2.25	1.25
SSDP8/30B	30	3.75	4	2	0.875	2.25	1.25
SSDP8/32B	32	4	4.25	2.5	1	2.25	1.25
SSDP8/36B	36	4.5	4.75	2.5	1	2.25	1.25
SSDP8/40B	40	5	5.25	2.5	1	2.25	1.25
SSDP8/42B	42	5.25	5.5	2.5	1	2.25	1.25
SSDP8/44B	44	5.5	5.75	2.5	1	2.25	1.25
SSDP8/48B	48	6	6.5	2.5	1	2.25	1.25

Please note: All dimensions subject to change. If a dimension is critical to your application please contact our Sales Department for confirmation. For special or reworked gears please contact our Manufacturing Department for a quotation.