



MOTOR DATA SHEET

MOTOR PART CODE:

11.043TECAB34-IE2

FRAME SIZE:

160M-4

50Hz

Output (kW)	11
Rotation Speed (rpm)	1460
Voltage	400/690
Full Load Current (A)	21.05 12.15
Full Load Torque (Nm)	71.95205479

60Hz

Output (kW)	13.2
Rotation Speed (rpm)	1752
Voltage	480 828
Full Load Current (A)	21.05 12.15
Full Load Torque (Nm)	59.96

Efficiency Data

100%	75%	50%
89.8	90.3	89.6

Factory Reference	MS2 160M-4
Tst/Tn (times)	2.5
Tmax/Tn	2.9
Noise (dB)	75
Moment of inertia	0.08962963
Type of feet	Removable feet
Protection	IP55
Rotation Direction	F / R
Cable Glands	2 - M32 × 1.5
Paint Colour	RAL 7024
Efficiency	IE2
Bearing (DE)	6309 2RS C3



Power Factor (cos)	0.84
Tmin/Tn	1.6
Ist/In (Times)	7.3
Net Weight (Kg)	81.5
Housing material	Aluminum
Insulation Class	F
Thermal Protection	PTC 130°C
Duty Cycle	S1
Cooling	IC411
Ambient Temperature	-20°C to + 40°C
Bearing Brand	NSK
Bearing (NDE)	6309 2RS C3

Motors designed and manufactured in accordance with:

**IEC 60034
IEC 60038
IEC 60072
2014/30/EU (EMC)
2014/35/EU (LVD)
2011/65/EU (RoHS 2)**

www.tecmotors.co.uk

TEC Electric Motors Ltd. reserves the right to amend or change motor designs or data sheet information

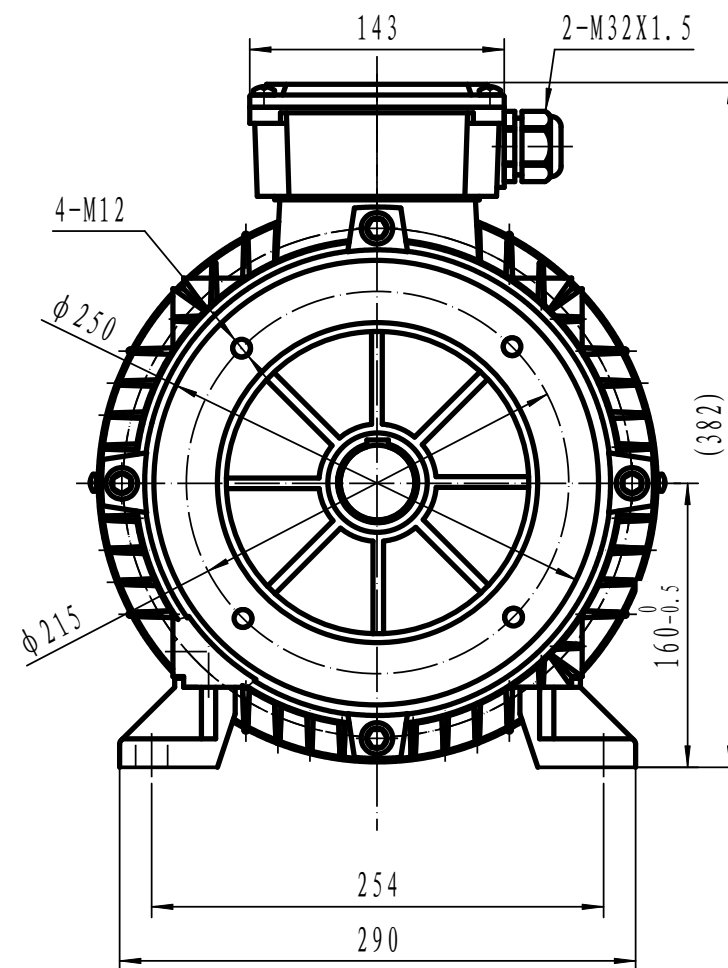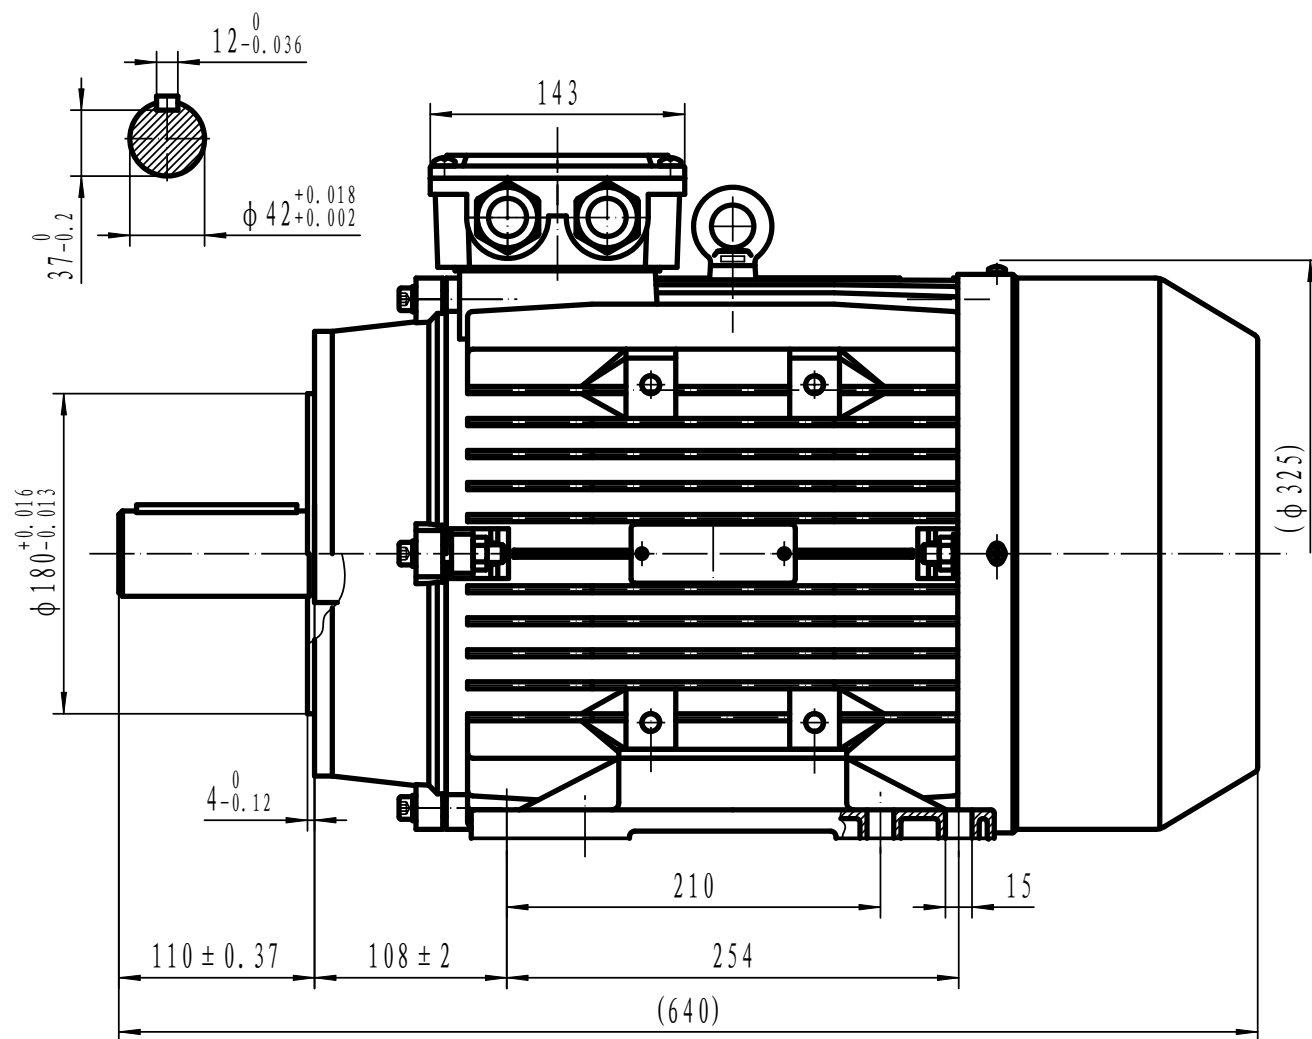

Drawn By	Date	TECA 160 B34
TECHTOP	27/11/2017	
Approved by	Date	
L. Overton	27/11/2017	
Issue No =	Date	 www.tecmotors.co.uk
001/A	27/11/2017	