



MOTOR DATA SHEET

MOTOR PART CODE:

160.063TECCB35-IE3

FRAME SIZE:

355M1-6

50Hz

Output (kW)	160
Rotation Speed (rpm)	980
Voltage	400/690
Full Load Current (A)	294.6 170.08
Full Load Torque (Nm)	1559.2

60Hz

Output (kW)	192
Rotation Speed (rpm)	1176
Voltage	480 828
Full Load Current (A)	294.6 170.08
Full Load Torque (Nm)	1299.33

Efficiency Data

100%	75%	50%
95.6	95.8	94.3

Factory Reference	T3C 355M1-6
Tst/Tn (times)	2
Tmax/Tn	2.3
Noise (dB)	92
Moment of inertia	8.97637
Type of feet	Fixed feet
Protection	IP55
Rotation Direction	F / R
Cable Glands	2 - M63× 1.5
Paint Colour	RAL 7024
Efficiency	IE3
Bearing (DE)	NU322 C3



Power Factor (cos)	0.82
Tmin/Tn	1.3
Ist/In (Times)	7.5
Net Weight (Kg)	1537
Housing material	Cast Iron
Insulation Class	F
Thermal Protection	PTC 140°C
Duty Cycle	S1
Cooling	IC411
Ambient Temperature	-20°C to +40°C
Bearing Brand	NSK
Bearing (NDE)	6322 C3

Motors designed and manufactured in accordance with:

**IEC 60034
IEC 60038
IEC 60072
2014/30/EU (EMC)
2014/35/EU (LVD)
2011/65/EU (RoHS 2)**

www.tecmotors.co.uk

TEC Electric Motors Ltd. reserves the right to amend or change motor designs or data sheet information

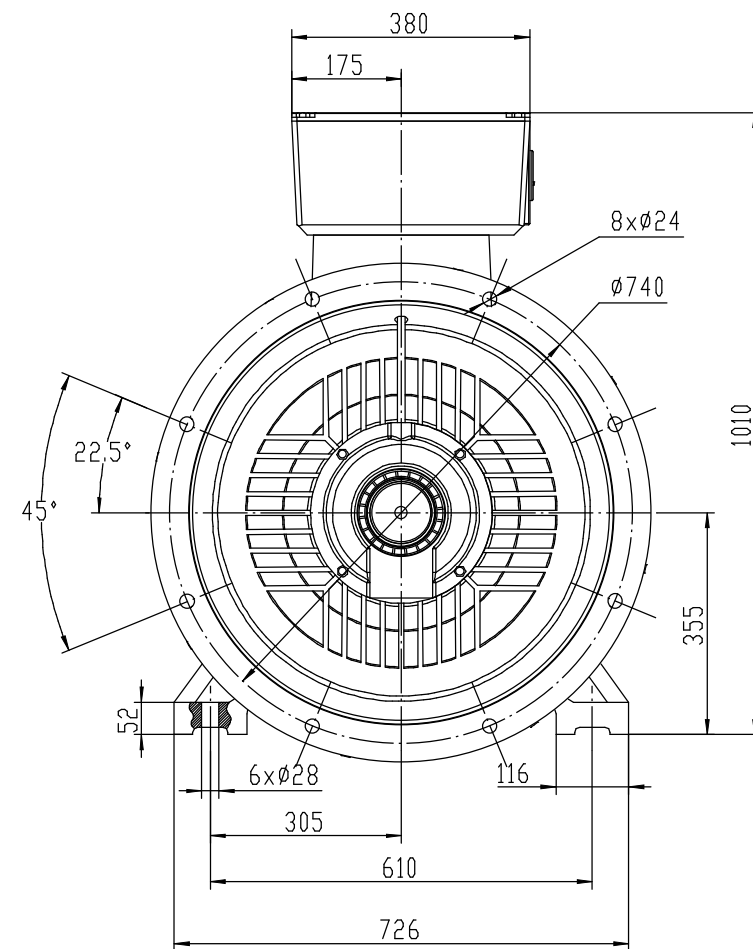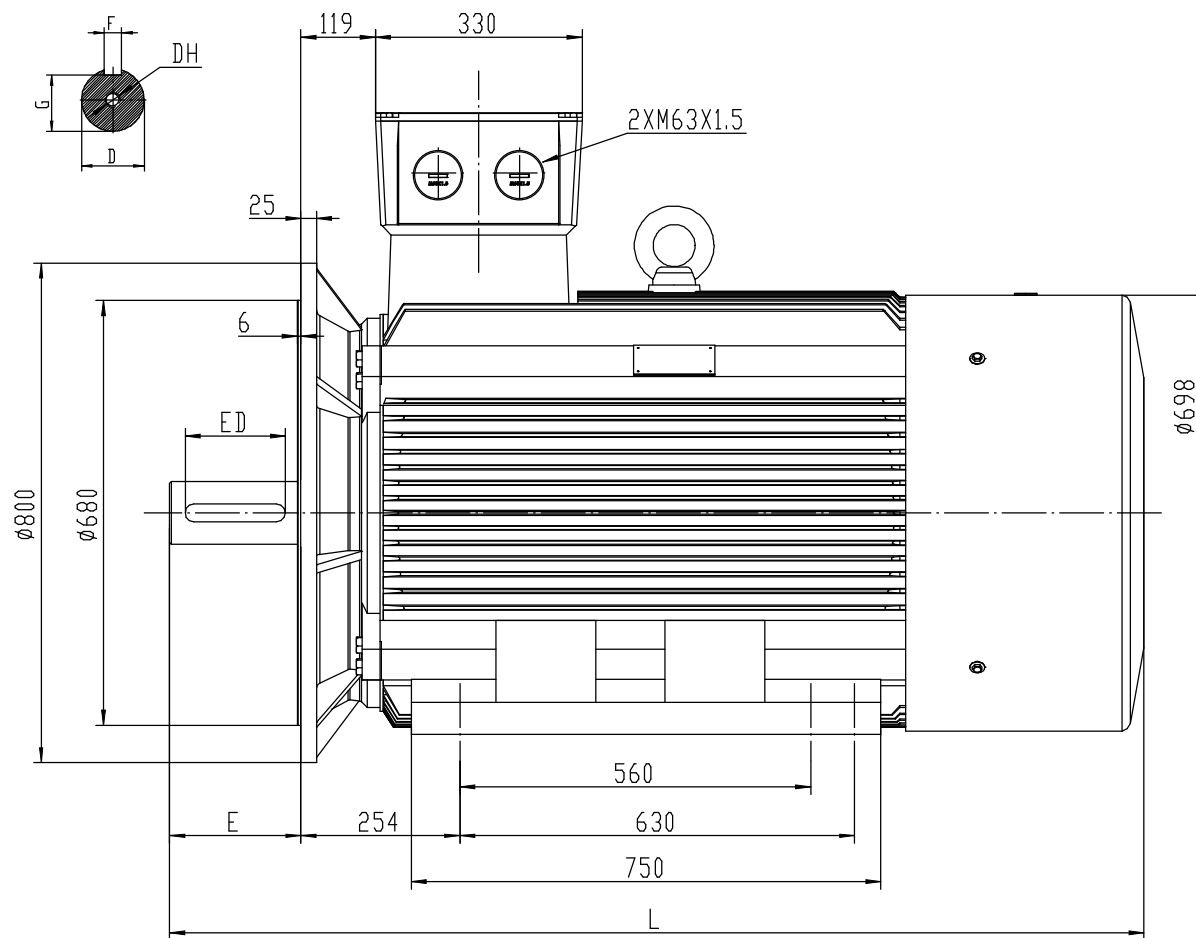

TYPE	D	E	F	G	DH	ED	L
Y2-355M/L-2P	$\phi 75$	140	20 $_{-0.043}^{+0.043}$	68	M20x42	110	1500
Y2-355M/L-4/6/8P	$\phi 100$	210	28 $_{-0.052}^{+0.052}$	90	M24x50	160	1570

Drawn By	Date
A442313	27/11/2017
Approved by	Date
L. Overton	27/11/2017
Issue No =	Date
BM01/A001	27/11/2017

TC 355ML4 B35

