




BS (16B) Platewheels 1" x 17.02mm C45

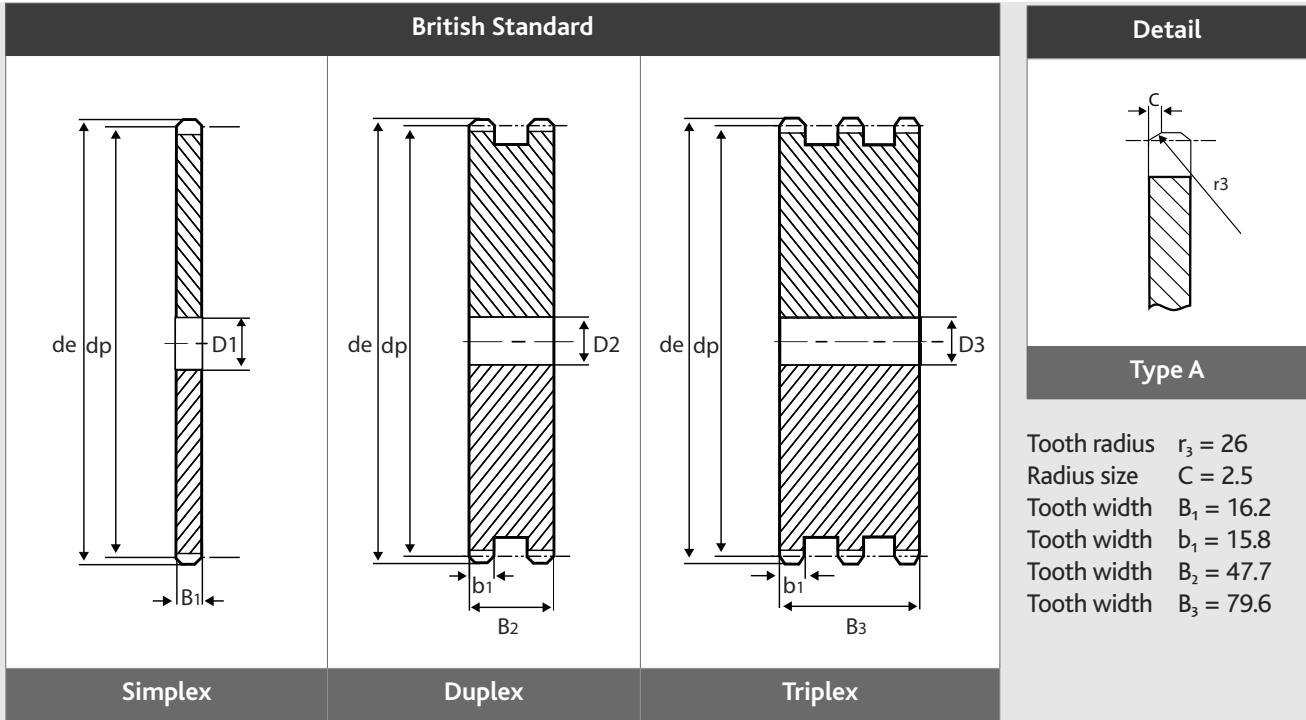

No. teeth	Outside dia. de	Pitch dia. dp	Simplex D1*	Duplex D2*	Triplex D3*
8	77	66.37	14	16	20
9	85	74.27	14	16	20
10	93	82.19	15	16	20
11	99.5	90.14	15	20	25
12	109	98.14	15	20	25
13	117	106.12	15	20	25
14	125	114.15	15	20	25
15	133	122.17	15	20	25
16	141	130.20	19	20	30
17	149	138.22	19	20	30
18	157	146.28	19	20	30
19	165.2	154.33	19	20	30
20	173	162.38	19	20	30
21	181.2	170.43	20	25	30
22	189.3	178.48	20	25	30
23	197.5	186.53	20	25	30
24	205.5	194.59	20	25	30
25	213.5	202.66	20	25	30
26	221.6	210.72	20	25	30
27	229.6	218.79	20	25	30
28	237.7	226.85	20	25	30
29	245.8	234.92	20	25	30
30	254	243.00	20	25	30
31	262	251.08	25	25	30

No. teeth	Outside dia. de	Pitch dia. dp	Simplex D1*	Duplex D2*	Triplex D3*
32	270	259.13	25	25	30
33	278.5	267.21	25	25	30
34	287	275.28	25	25	30
35	296.2	283.36	25	25	30
36	304.6	291.44	25	25	30
37	312.6	299.51	25	25	30
38	320.7	307.59	25	25	30
39	328.8	315.67	25	25	30
40	336.9	323.75	25	25	30
41	345	331.82	25		
42	353	339.90	25	25	30
43	361.1	347.98	25	25	
44	369.1	356.06	25	25	30
45	377.1	364.13	25	25	30
46	385.2	372.21	25	30	30
47	393.2	380.29	25		
48	401.3	388.36	25	30	30
49	409.3	396.44	25		
50	417.4	404.52	25	30	30
51	425.5	412.60	30	30	40
52	433.6	420.67	30	30	40
53	441.7	428.75	30		
54	448.3	436.85	30		
55	457.9	444.93	30	30	40

No. teeth	Outside dia. de	Pitch dia. dp	Simplex D1*	Duplex D2*	Triplex D3*
56	466	453.01	30	30	
57	474	461.07	30	30	40
58	482.1	469.16	30		
59	490.2	477.24	30		
60	498.3	485.32	30	30	40
62	514.5	501.50	30	30	
64	530.7	517.65	30		
65	538.8	525.73	30	30	40
66	546.8	533.80	30		
68	562.9	549.98	30	30	40
70	579.2	566.14	30	30	40
72	595.4	582.32	30	30	40
75	619.7	606.55	30	30	40
76	627	614.65	30	30	40
78	643.3	630.80	30		
80	660	646.96	30	30	40
85	699.9	687.40	30	30	40
90	740.3	727.81	30	30	40
95	781.1	768.22	30	30	40
100	821.1	808.63	30	30	40
110	902	889.48	30	30	40
114	934.3	921.81	30	40	40
120	982.8	970.33	30	40	40

* Bore Ø H12

All dimensions in mm. Intermediate sizes & special sprockets to drawing up to 1000mm diameter. Standard: to DIN 8187 ISO/R 606

Available from stock Special order - typically 7-10 days