




Imperial Spur Gears in Steel 20DP, 20° P.A

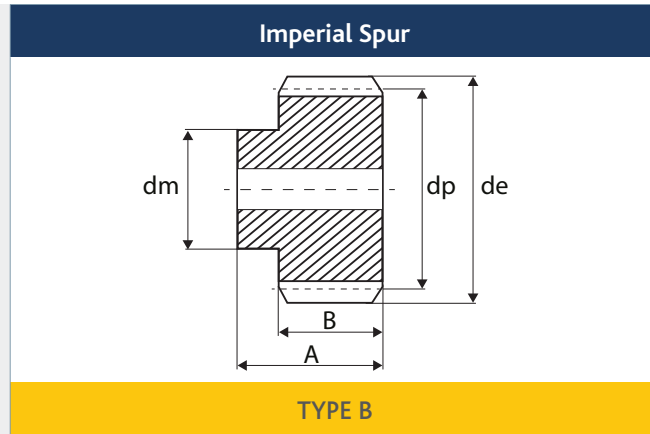

- Intermediate sizes and special gears to drawing up to 39" diameter
- Standard tolerances, unless otherwise stated ± 0.010 ins
- Standard: BS 436 Pt1, fig 1. Grade 8 / 9
- All dimensions in inches
- Steel EN8, (080M40/080M46) or equivalent

Code	No. teeth	Pitch \varnothing dp	Outside \varnothing de	Hub/Boss \varnothing dm	Bore \varnothing H8	O/A width A	Face width B
SSDP20/12B	12	0.6	0.7	0.44	0.313	0.75	0.375
SSDP20/13B	13	0.65	0.75	0.47	0.313	0.75	0.375
SSDP20/14B	14	0.7	0.8	0.5	0.313	0.75	0.375
SSDP20/15B	15	0.75	0.85	0.56	0.375	0.75	0.375
SSDP20/16B	16	0.8	0.9	0.625	0.375	0.75	0.375
SSDP20/18B	18	0.9	1	0.69	0.375	0.75	0.375
SSDP20/20B	20	1	1.1	0.75	0.375	0.75	0.375
SSDP20/22B	22	1.1	1.2	0.75	0.375	0.75	0.375
SSDP20/24B	24	1.2	1.3	0.75	0.375	0.75	0.375
SSDP20/25B	25	1.25	1.35	0.75	0.375	0.75	0.375
SSDP20/28B	28	1.4	1.5	0.75	0.375	0.75	0.375
SSDP20/30B	30	1.5	1.6	0.75	0.375	0.75	0.375
SSDP20/32B	32	1.6	1.7	1	0.5	0.875	0.375
SSDP20/35B	35	1.75	1.85	1	0.5	0.875	0.375
SSDP20/36B	36	1.8	1.9	1	0.5	0.875	0.375
SSDP20/40B	40	2	2.1	1	0.5	0.875	0.375
SSDP20/48B	48	2.4	2.5	1	0.5	0.875	0.375
SSDP20/50B	50	2.5	2.6	1	0.5	0.875	0.375
SSDP20/60B	60	3	3.1	1	0.5	0.875	0.375
SSDP20/64B	64	3.2	3.3	1	0.5	0.875	0.375

Please note: All dimensions subject to change. If a dimension is critical to your application please contact our Sales Department for confirmation. For special or reworked gears please contact our Manufacturing Department for a quotation.