



MOTOR DATA SHEET

MOTOR PART CODE:

280.043TECCB3-IE2

FRAME SIZE:

355L1-4

50Hz

Output (kW)	280
Rotation Speed (rpm)	1480
Voltage	400/690
Full Load Current (A)	477.49/275.67
Full Load Torque (Nm)	1806.8

60Hz

Output (kW)	336
Rotation Speed (rpm)	1776
Voltage	480/828
Full Load Current (A)	477.49/275.67
Full Load Torque (Nm)	1505.67

Efficiency Data

100%	75%	50%
95.1	95.9	94.3

Factory Reference	T2C 355L1-4
Tst/Tn (times)	1.8
Tmax/Tn	2.3
Noise (dB)	101
Moment of inertia	8.31927
Type of feet	Fixed feet
Protection	IP55
Rotation Direction	F / R
Cable Glands	2 - M63× 1.5
Paint Colour	RAL 7024
Efficiency	IE2
Bearing (DE)	NU322 C3



Power Factor (cos)	0.89
Tmin/Tn	1.3
Ist/In (Times)	5.5
Net Weight (Kg)	1650
Housing material	Cast Iron
Insulation Class	F
Thermal Protection	PTC 140°C
Duty Cycle	S1
Cooling	IC 411
Ambient Temperature	-20°C to +40°C
Bearing Brand	NSK
Bearing (NDE)	6322 C3

Motors designed and manufactured in accordance with:

**IEC 60034
IEC 60038
IEC 60072
2014/30/EU (EMC)
2014/35/EU (LVD)
2011/65/EU (RoHS 2)**

www.tecmotors.co.uk

TEC Electric Motors Ltd. reserves the right to amend or change motor designs or data sheet information

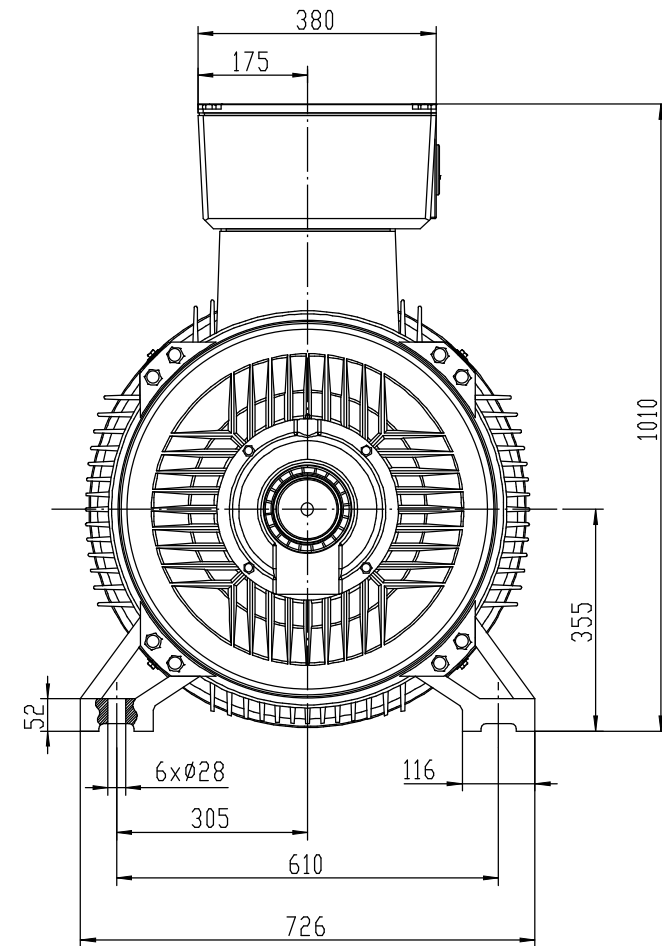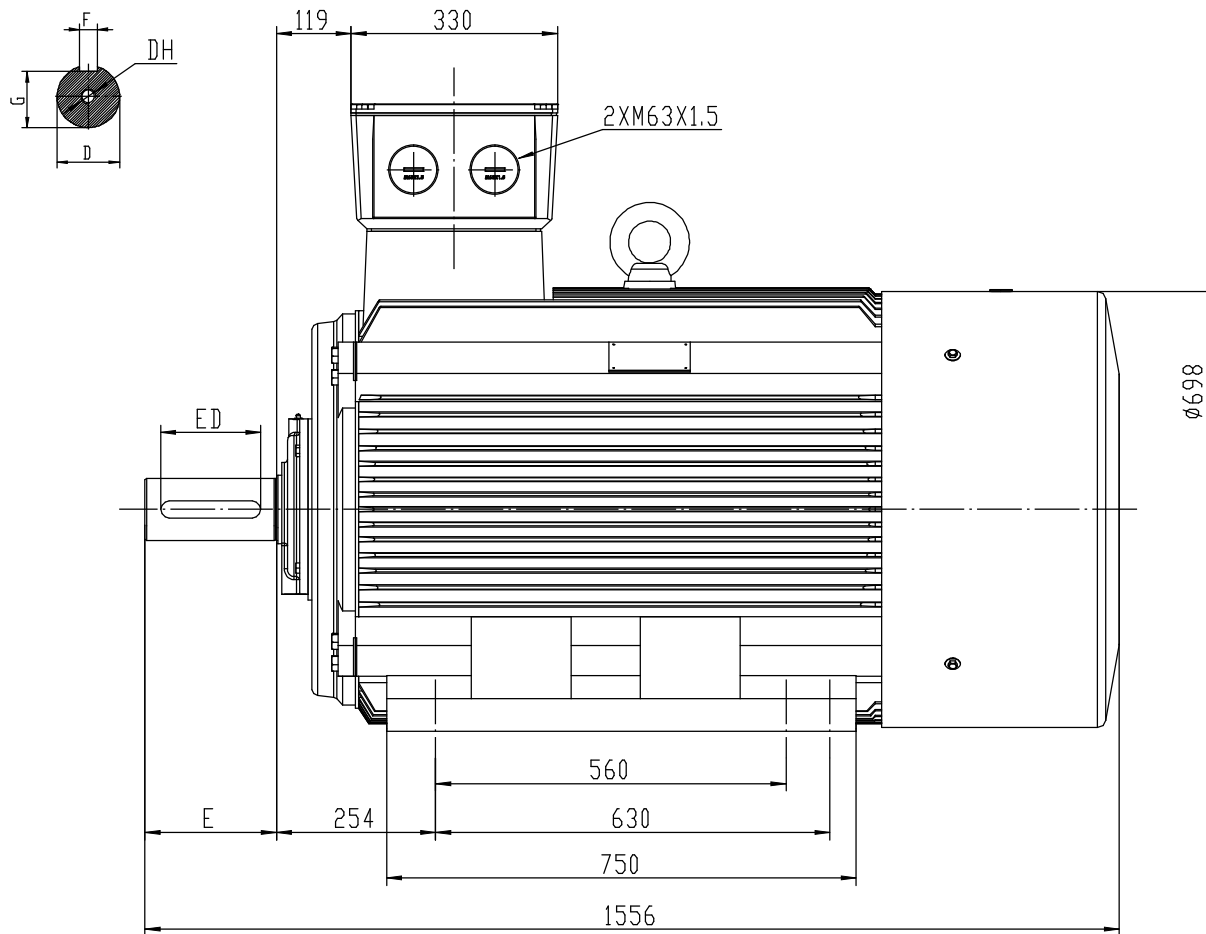

TYPE	D	E	F	G	DH	ED	L	
Y2-355M/L-2P	Ø75	140	20 ^{-0.043}	68	M20x42	110	1500	
Y2-355M/L-4/6/8P	Ø100	210	28 ^{-0.052}	90	M24x50	160	1570	

Drawn By	Date	TC 355ML4 B3
A442313	27/11/2017	
Approved by	Date	
L. Overton	27/11/2017	
Issue No =	Date	 www.tecmotors.co.uk
BM01/A001	27/11/2017	