


Metric Spur Gears in Steel 6.0 MOD, 20° P.A

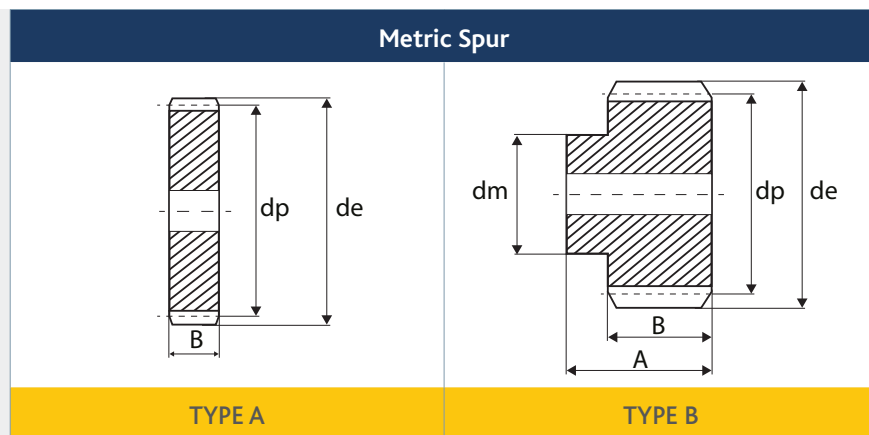

- Intermediate sizes and special gears to drawing, up to 1000mm diameter
- Standard to DIN 867, DIN 3962, DIN 3963, Grade/Quality 9 or equivalent
- Standard tolerances, unless otherwise stated $\pm 0.25\text{mm}$
- All dimensions in mm
- Steel EN8, (080M40/080M46) or equivalent

Code	Type	No. teeth	Pitch \varnothing dp	Bore \varnothing H8	Hub/Boss \varnothing dm	Outside \varnothing de	O/A width A	Face width B
SS60/12B	B	12	72	20	54	84	80	60
SS60/13B	B	13	78	20	60	90	80	60
SS60/15B	B	15	90	20	70	102	80	60
SS60/16B	B	16	96	20	75	108	80	60
SS60/18B	B	18	108	20	80	120	80	60
SS60/20B	B	20	120	20	90	132	80	60
SS60/24B	B	24	144	25	110	156	80	60
SS60/25B	B	25	150	25	110	162	80	60
SS60/30B	B	30	180	25	140	192	80	60
SS60/40B	B	40	240	25	150	252	80	60
SS60/42B	B	42	252	25	150	264	80	60
SS60/45B	B	45	270	25	150	282	80	60
SS60/48B	B	48	288	25	170	300	80	60
SS60/50B	B	50	300	30	180	312	80	60
SS60/55B	B	55	330	30	180	342	80	60
SS60/56B	B	56	336	30	180	348	80	60
SS60/60B	B	60	360	40	180	372	80	60
SS60/28A	A	28	168	25	-	180	-	60
SS60/30A	A	30	180	25	-	192	-	60
SS60/32A	A	32	192	25	-	204	-	60
SS60/35A	A	35	210	25	-	222	-	60
SS60/38A	A	38	228	25	-	240	-	60

Please note: All dimensions subject to change. If a dimension is critical to your application please contact our Sales Department for confirmation. For special or reworked gears please contact our Manufacturing Department for a quotation.