




GEARS & RACKS

Metric Spur Gears

Metric Spur Gears in Stainless Steel 2 MOD, 20° P.A

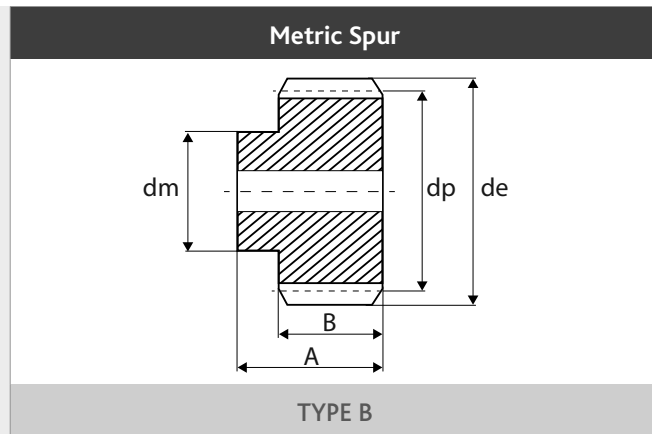

- Intermediate sizes and special gears to drawing, up to 1000mm diameter
- Standard to DIN 867, DIN 3962, DIN 3963, Grade/Quality 9 or equivalent
- Standard tolerances, unless otherwise stated $\pm 0.25\text{mm}$
- All dimensions in mm
- Stainless Steel AISI 303/304

Code	Type	No. teeth	Pitch \varnothing dp	Bore \varnothing H8	Hub/Boss \varnothing dm	Outside \varnothing de	O/A width A	Face width B
STS20/12B	B	12	24	8	18	28	35	20
STS20/15B	B	15	30	8	25	34	35	20
STS20/16B	B	16	32	8	25	36	35	20
STS20/20B	B	20	40	10	30	44	35	20
STS20/24B	B	24	48	10	35	52	35	20
STS20/25B	B	25	50	10	35	54	35	20
STS20/30B	B	30	60	10	40	64	35	20
STS20/36B	B	36	72	10	40	76	35	20
STS20/40B	B	40	80	10	50	84	35	20
STS20/48B	B	48	96	10	60	100	35	20
STS20/50B	B	50	100	10	80	104	35	20
STS20/60B	B	60	120	10	80	124	35	20

Please note: All dimensions subject to change. If a dimension is critical to your application please contact our Sales Department for confirmation. For special or reworked gears please contact our Manufacturing Department for a quotation.