




Metric Spur Gears in Moulded HOSTAFORM[®], 3.0 MOD, 20° P.A

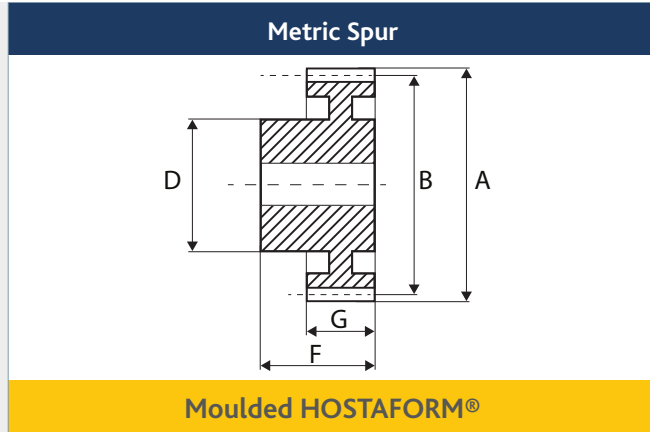

- Intermediate sizes and special gears to drawing (tooling charges may apply)
- Standard tolerances, unless otherwise stated $\pm 0.25\text{mm}$
- All dimensions in mm
- Moulded HOSTAFORM[®] C to DIN 3962/63/67 Grade 12

Code	No. teeth	Pitch \varnothing B	Bore (H9)	Hub/Boss \varnothing D	Outside \varnothing A	O/A width F	Face width G
WPS30/12B	12	36	12	24	42	34	19
WPS30/13B	13	39	12	24	45	34	19
WPS30/14B	14	42	12	24	48	34	19
WPS30/15B	15	45	12	24	51	34	19
WPS30/16B	16	48	12	24	54	34	19
WPS30/17B	17	51	12	24	57	34	19
WPS30/18B	18	54	12	24	60	34	19
WPS30/19B	19	57	12	24	63	34	19
WPS30/20B	20	60	12	24	66	34	19
WPS30/21B	21	63	12	24	69	34	19
WPS30/22B	22	66	12	24	72	34	19
WPS30/24B	24	72	12	24	78	34	19
WPS30/25B	25	75	14	28	81	34	19
WPS30/26B	26	78	14	28	84	34	19
WPS30/27B	27	81	14	28	87	34	19
WPS30/28B	28	84	14	28	90	34	19
WPS30/30B	30	90	14	28	96	34	19
WPS30/32B	32	96	16	32	102	34	19
WPS30/33B	33	99	16	32	105	34	19
WPS30/35B	35	105	16	32	111	34	19
WPS30/38B	38	114	16	32	120	34	19
WPS30/40B	40	120	16	32	126	34	19
WPS30/45B	45	135	16	32	141	34	19

Please note: All dimensions subject to change. If a dimension is critical to your application please contact our Sales Department for confirmation. For special or reworked gears please contact our Manufacturing Department for a quotation.