



BRAKE MOTOR DATA SHEET

MOTOR PART CODE:

0.1843TECAB34-BM

FRAME SIZE:

632-4

50Hz

Output (kW)	0.18
Rotation Speed (rpm)	1310
Voltage	230/400
Full Load Current (A)	1.21 0.7
Full Load Torque (Nm)	1.31

60Hz

Output (kW)	0.216
Rotation Speed (rpm)	1572
Voltage	276 480
Full Load Current (A)	1.21 0.7
Full Load Torque (Nm)	1.09

Efficiency Data

100%	75%	50%
57	56.4	52

Factory Reference	MSB632-4
Tst/Tn (times)	2.2
Tmax/Tn	2.4
Noise (dB)	52
Moment of inertia	0.000338
Type of feet	Removable feet
Protection	IP55
Rotation Direction	F / R
Cable Glands	1 - M20× 1.5
Paint Colour	RAL 7024
Brake Torque (Nm)	3
Brake Voltage	205v DC
Rectifier	Full Wave


Power Factor (cos)	0.65
Tmin/Tn	2
Ist/In (Times)	4
Net Weight (Kg)	4.2
Housing material	Aluminum
Insulation Class	F
Thermal Protection	PTC 130°C
Duty Cycle	S1
Cooling	IC411
Ambient Temperature	-20°C to +40°
Bearing Brand	NSK
Bearing (DE)	6201 2RS C3
Bearing (NDE)	6201 2RS C3

Motors designed and manufactured in accordance with:

IEC 60034
IEC 60038
IEC 60072
2014/30/EU (EMC)
2014/35/EU (LVD)
2011/65/EU (RoHS 2)

www.tecmotors.co.uk

TEC Electric Motors Ltd. reserves the right to amend or change motor designs or data sheet information

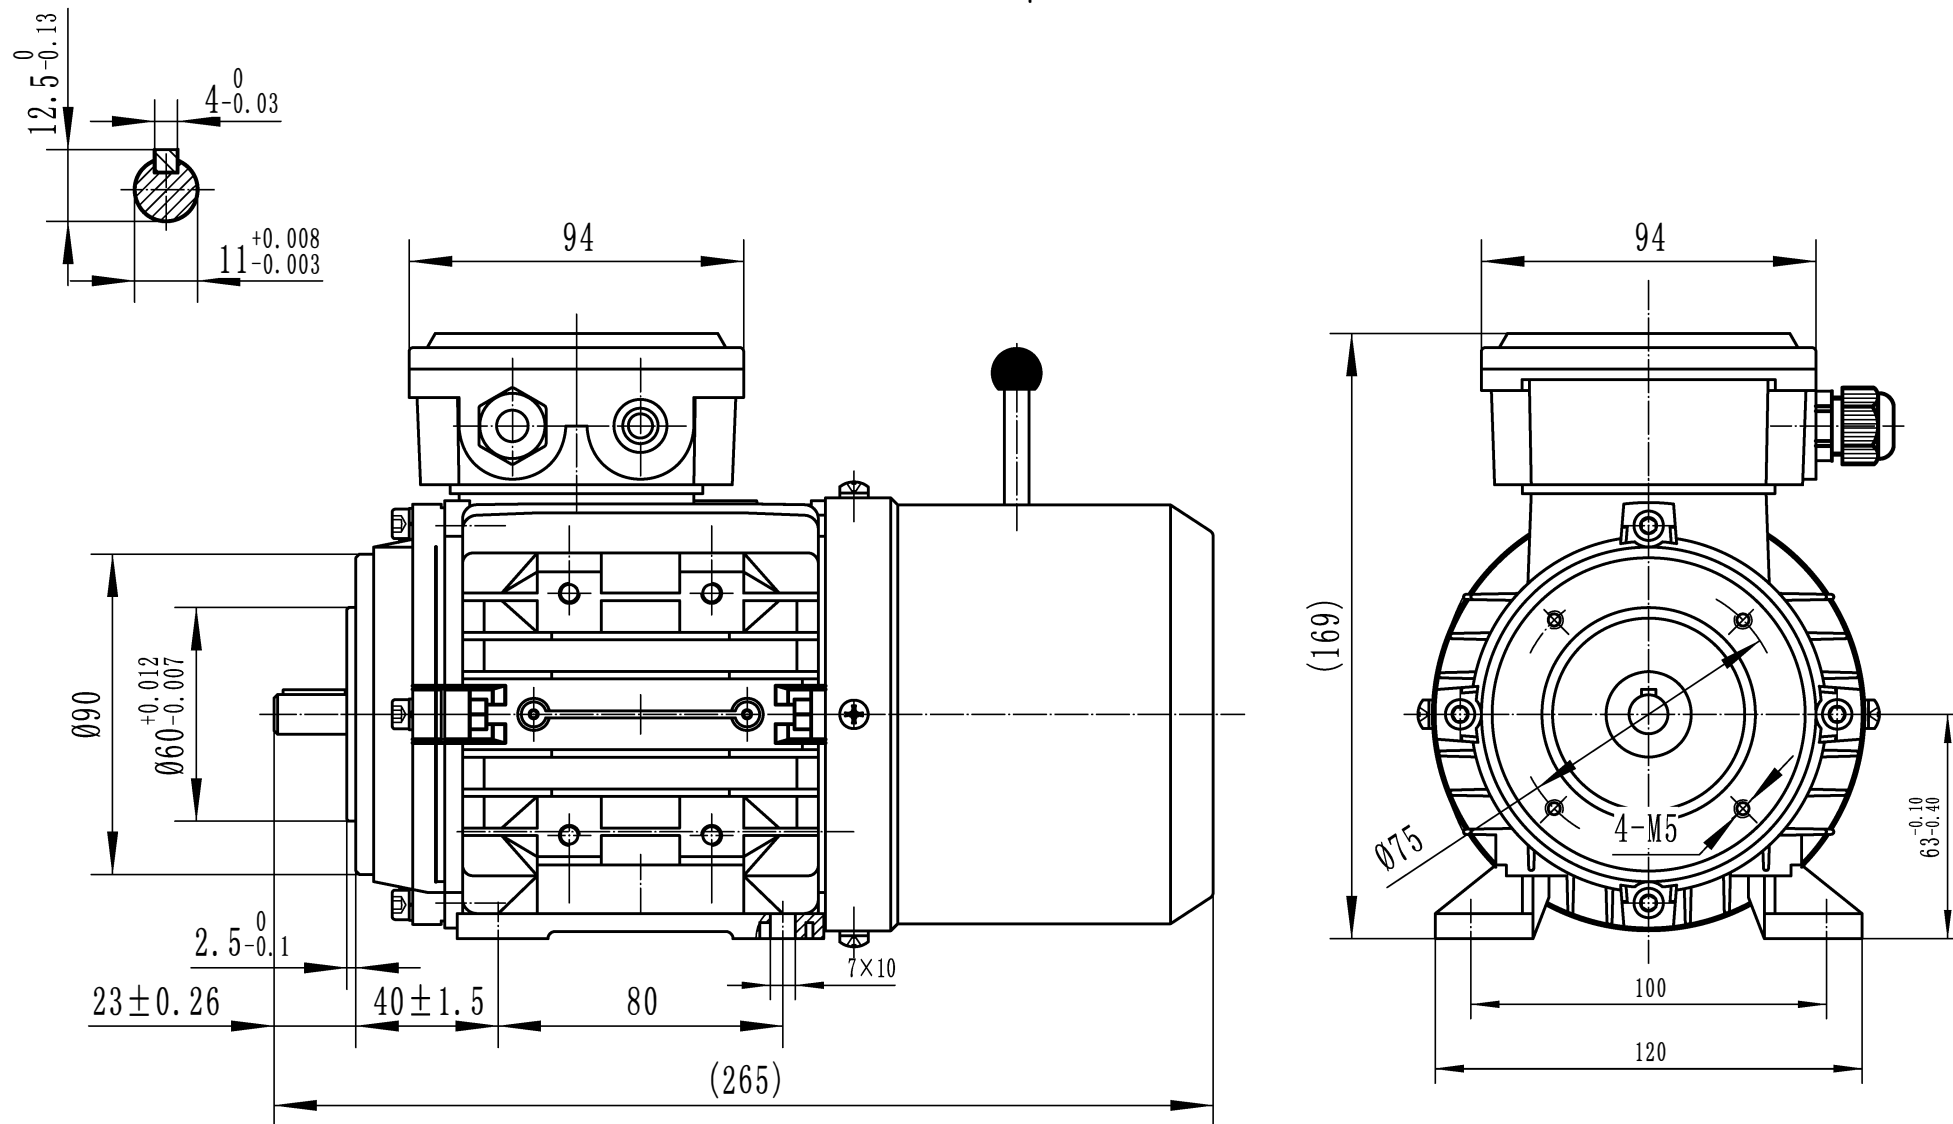

Drawn By	Date	TECA BM 63 B34
A442313	27/11/2017	
Approved by	Date	
L. Overton	27/11/2017	
Issue No =	Date	 www.tecmotors.co.uk
BM01/A001	27/11/2017	