



MOTOR DATA SHEET

MOTOR PART CODE:

30.043TECCB3-IE2

FRAME SIZE:

200L-4

50Hz

Output (kW)	30
Rotation Speed (rpm)	1460
Voltage	400/690
Full Load Current (A)	53.31/30.78
Full Load Torque (Nm)	196.2

60Hz

Output (kW)	36
Rotation Speed (rpm)	1752
Voltage	480/828
Full Load Current (A)	53.31/30.78
Full Load Torque (Nm)	163.50

Efficiency Data

100%	75%	50%
92.3	92.8	91.9

Factory Reference	T2C 200L-4
Tst/Tn (times)	2.5
Tmax/Tn	3
Noise (dB)	79
Moment of inertia	0.27306
Type of feet	Removable feet
Protection	IP55
Rotation Direction	F / R
Cable Glands	2 - M40× 1.5
Paint Colour	RAL 7024
Efficiency	IE2
Bearing (DE)	6312 C3





Power Factor (cos)	0.88
Tmin/Tn	2.1
Ist/In (Times)	8.5
Net Weight (Kg)	242
Housing material	Cast Iron
Insulation Class	F
Thermal Protection	PTC 140°C
Duty Cycle	S1
Cooling	IC 411
Ambient Temperature	-20°C to +40°C
Bearing Brand	NSK
Bearing (NDE)	6312 C3

Motors designed and manufactured in accordance with:

**IEC 60034
IEC 60038
IEC 60072
2014/30/EU (EMC)
2014/35/EU (LVD)
2011/65/EU (RoHS 2)**

www.tecmotors.co.uk

TEC Electric Motors Ltd. reserves the right to amend or change motor designs or data sheet information

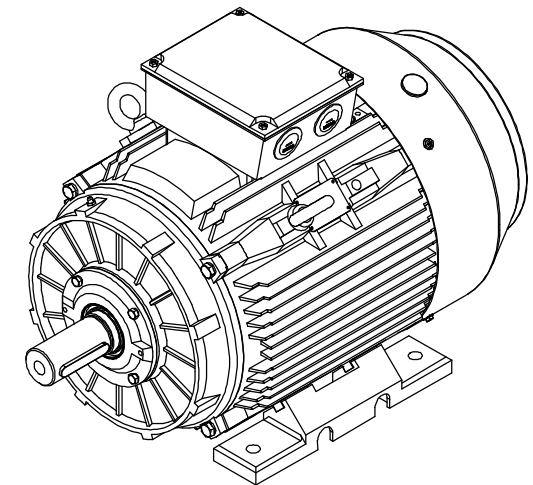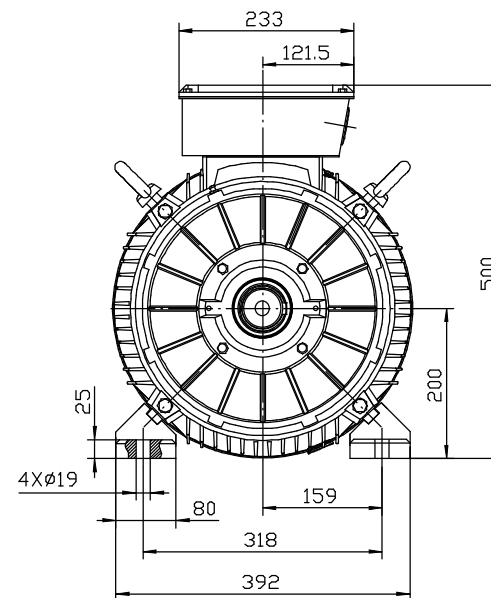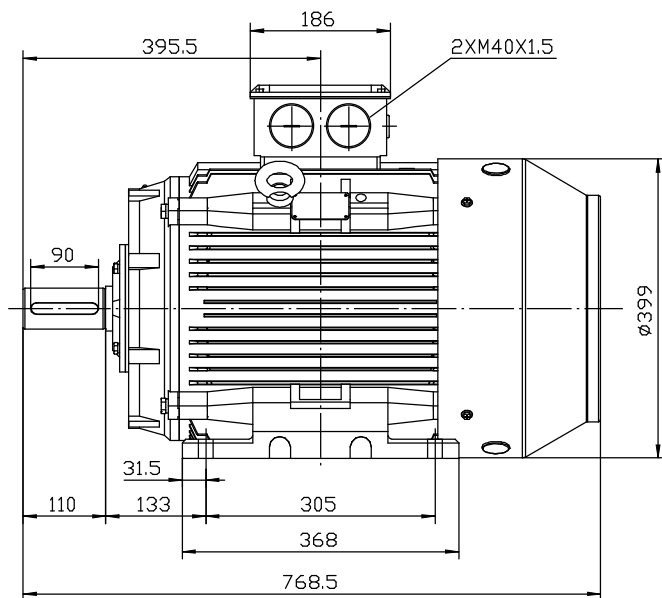

Drawn By	Date	TC 200 B3
A442313	27/11/2017	
Approved by	Date	
L. Overton	27/11/2017	
Issue No =	Date	
BM01/A001	27/11/2017	

