



BRAKE MOTOR DATA SHEET

MOTOR PART CODE:

7.543TECAB14-BM

FRAME SIZE:

132M-4

50Hz

Output (kW)	7.5
Rotation Speed (rpm)	1450
Voltage	400/690
Full Load Current (A)	14.53 8.39
Full Load Torque (Nm)	49.4

60Hz

Output (kW)	9
Rotation Speed (rpm)	1740
Voltage	480 828
Full Load Current (A)	14.53 8.39
Full Load Torque (Nm)	41.17

Efficiency Data

100%	75%	50%
88.7	89.2	88.4

Factory Reference	MSB132M-4
Tst/Tn (times)	3.1
Tmax/Tn	3.4
Noise (dB)	71
Moment of inertia	0.035864
Type of feet	Not Fitted
Protection	IP55
Rotation Direction	F / R
Cable Glands	2 - M25 × 1.5
Paint Colour	RAL 7024
Brake Torque (Nm)	100
Brake Voltage	178v DC
Rectifier	Half Wave




Power Factor (cos)	0.84
Tmin/Tn	2.1
Ist/In (Times)	8.8
Net Weight (Kg)	52.6
Housing material	Aluminum
Insulation Class	F
Thermal Protection	PTC 130°C
Duty Cycle	S1
Cooling	IC411
Ambient Temperature	-20°C to + 40°C
Bearing Brand	NSK
Bearing (DE)	6308 2RS C3
Bearing (NDE)	6208 2RS C3

Motors designed and manufactured in accordance with:

**IEC 60034
IEC 60038
IEC 60072
2014/30/EU (EMC)
2014/35/EU (LVD)
2011/65/EU (RoHS 2)**

www.tecmotors.co.uk

TEC Electric Motors Ltd. reserves the right to amend or change motor designs or data sheet information

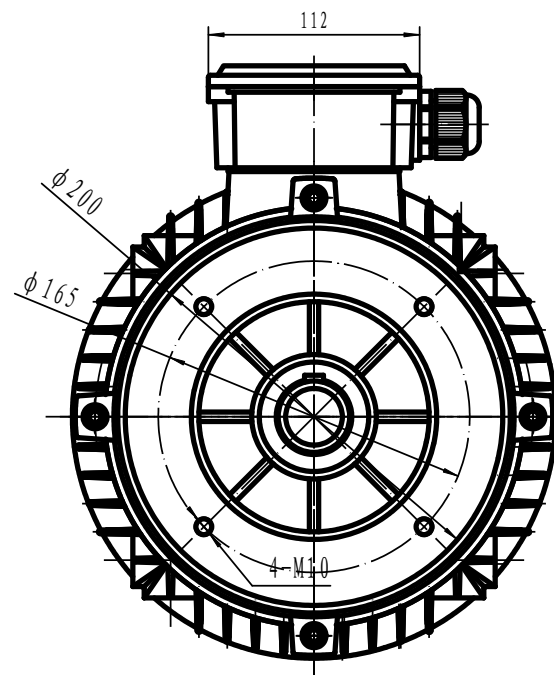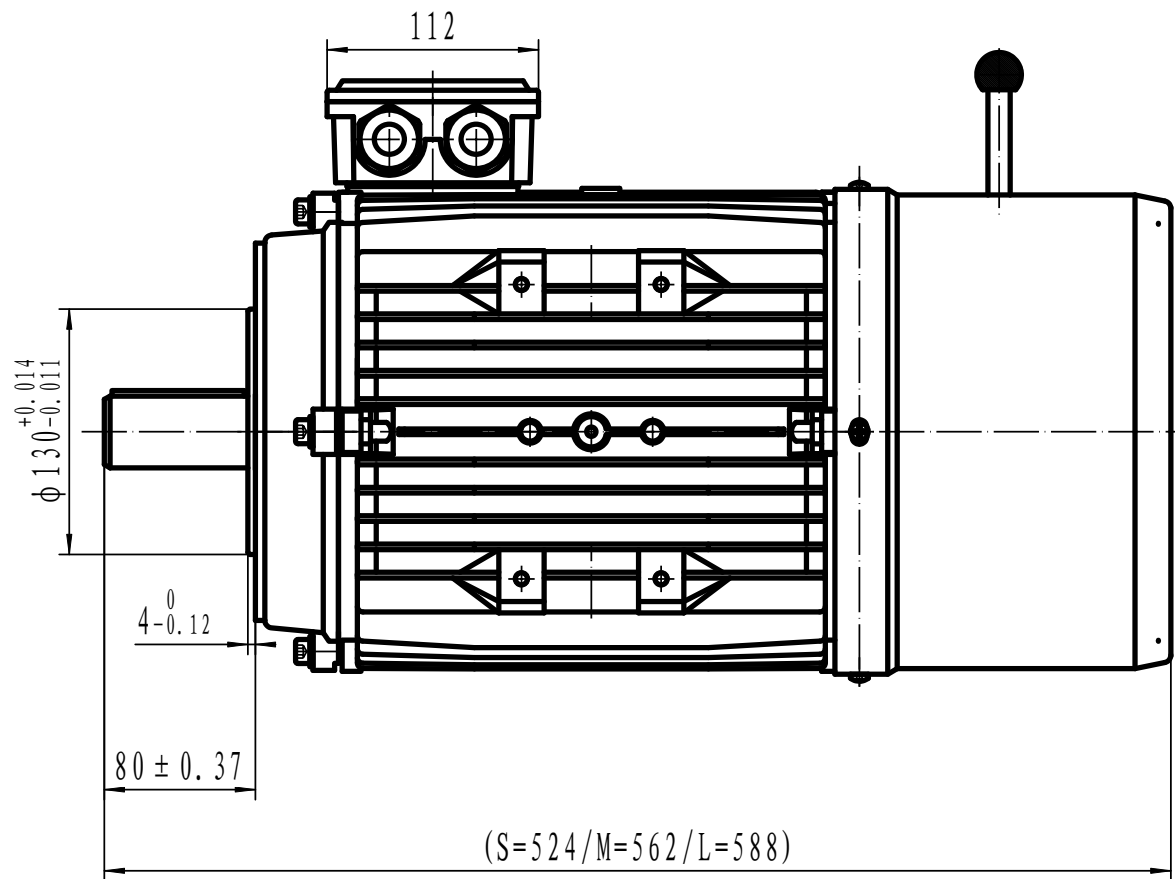

										上海特波电机有限公司		
										MSB132 B14		
标记	处数	分区	更改文件号	签名	年、月、日	阶段标记		重量	比例			
设计			标准化							1:2		
审核												
工艺			批准			共	张	第	张			